

Product Data Sheet

2. Tyton fittings

2.03 Double socket bend

Double socket bend 45° (MMK 45°) PN10/16

Material EN 1563 EN-GJS-400-15


Design Std. EN 545

Coating Epoxy GSK RAL-GZ 662

Approval Kiwa BRL-K772/04



Kolk Tyton fittings are made of ductile iron GJS-400/500 (DIN1693 GGG-40/50). Design acc. to EN 545, flange drilling acc. to EN 1092-2 (ISO 7005-2). Epoxy coated (Resicoat®) acc. to EN 14901 (DIN 30677-2) and GSK certified (RAL-GZ 662).

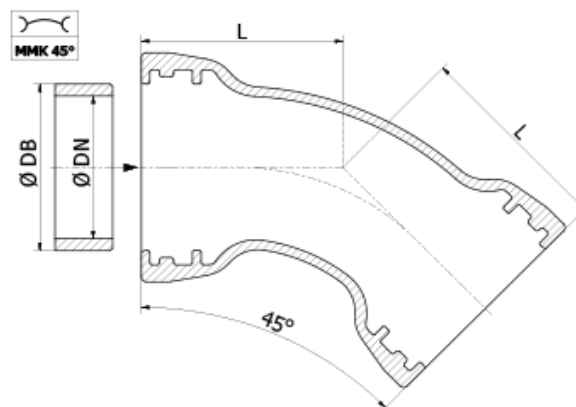

Double socket bend 45° (MMK 45°) PN10/16

Article	Article Nr.	PN	Ø DN [mm]	Ø DB [mm]	L [mm]	G [kg]								
MMK 80-45°	2.04MMK1.000017	PN10/16	80	98	55	7								
MMK 100-45°	2.04MMK1.010017	PN10/16	100	118	65	10								
MMK 125-45°	2.04MMK1.010027	PN10/16	125	144	75	10								
MMK 150-45°	2.04MMK1.010037	PN10/16	150	170	85	16								
MMK 200-45°	2.04MMK1.020017	PN10/16	200	222	110	24								
MMK 250-45°	2.04MMK1.020027	PN10/16	250	274	130	34								
MMK 300-45°	2.04MMK1.030017	PN10/16	300	326	150	49								
MMK 350-45°	2.04MMK1.030027	PN10/16	350	378	175	62								
MMK 400-45°	2.04MMK1.040017	PN10/16	400	429	200	86								
MMK 450-45°	2.04MMK1.040027	PN10/16	450	477	220	120								
MMK 500-45°	2.04MMK1.050017	PN10/16	500	532	240	128								
MMK 600-45°	2.04MMK1.060017	PN10/16	600	635	285	184								
MMK 700-45°	2.04MMK1.070017	PN10/16	700	738	330	296								
MMK 800-45°	2.04MMK1.080017	PN10/16	800	842	370	410								
MMK 900-45°	2.04MMK1.090017	PN10/16	900	948	415	578								
MMK 1000-45°	2.04MMK1.100017	PN10/16	1000	1048	460	770								
MMK 1200-45°	2.04MMK1.120017	PN10/16	1200	1255	550	1150								